





Section 'AA'

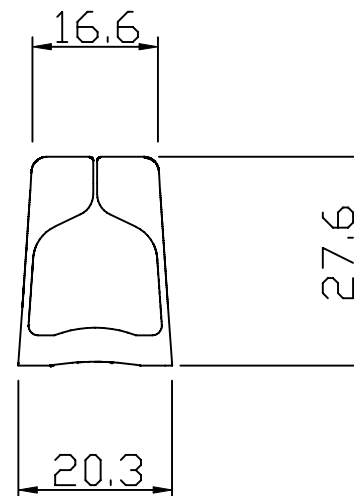

R36

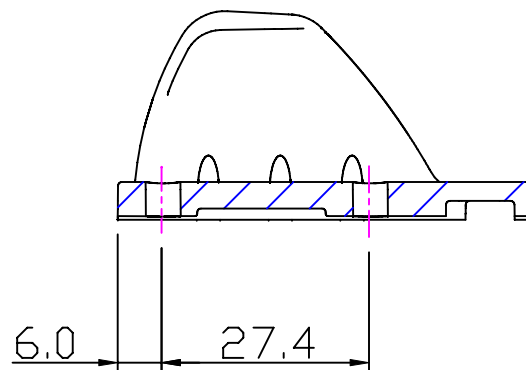

2 Holes Ø5.5

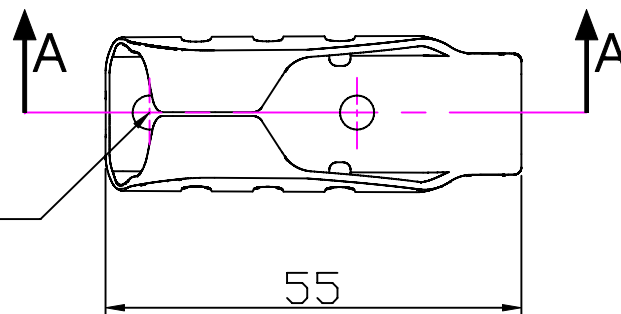

Instructions and
compatible cleats
on page 2


Issue: 2. May 2006
Page1 of 2 ID815.dwg

Material:
Acetal

Installation Drawing for:-

CL815

Keeper for CL211Mk2



Clamcleats Limited
Watchmead
Welwyn Garden City
Hertfordshire AL7 1AP
England


Telephone +44 (0)1707 330101
Fax +44 (0)1707 321269
<http://www.clamcleat-rope-cleats.com>



Scale 1:1
All dimensions in mm.


Rope runs free

Keeper is closed to stop rope going into cleat teeth.

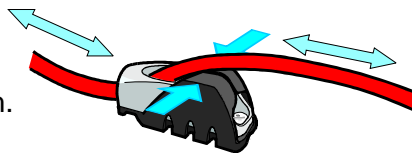


Pull rope back and down to cleat

Keeper opens to allow rope into teeth

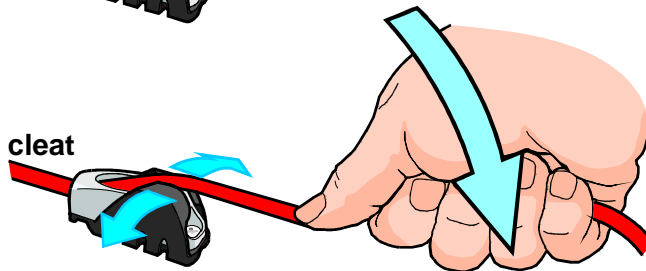


Rope gripped

Keeper holds rope in cleat

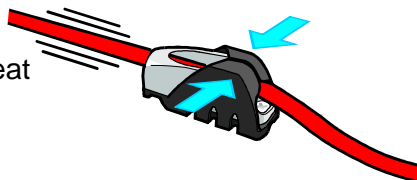


Lift up to release


Keeper opens to allow rope out of teeth

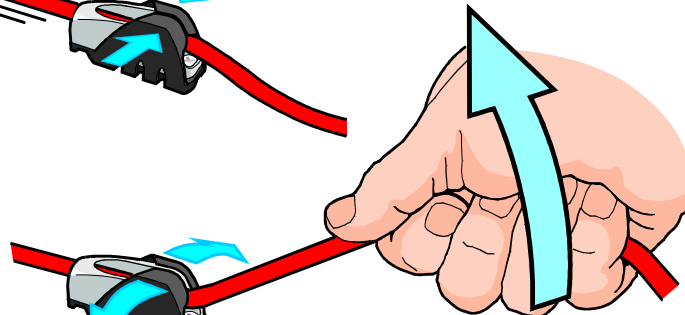



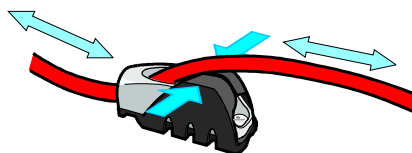

Rope runs free again

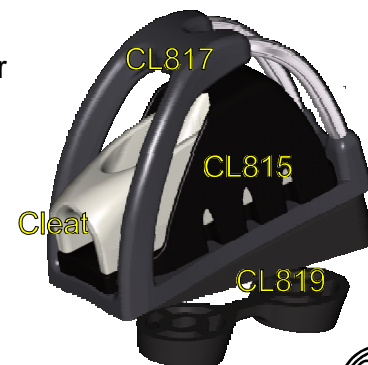

CL815 Keeper can be used with a variety of cleats and other accessories.



Cleat	 Cleat + CL815	 Cleat + CL815 + CL819	 Cleat + CL815 + CL817	 Cleat + CL815 + CL817 + CL819
CL211 Mk2	✓	✓	✓	✓
CL211 Mk2AN	✓	✓	✓	✓
CL211 Mk2/S2	✓	✓		
CL211 Mk2AN/S2	✓	✓		



Clamcleats Limited
Watchmead
Welwyn Garden City
Hertfordshire AL7 1AP
England

Telephone +44 (0)1707 330101
Fax +44 (0)1707 321269
www.clamcleat.com

ID815
page 2 of 2

Issue 2
July 2006

Installation Drawing for:-

CL815

Keeper for Mk2 Racing Juniors