

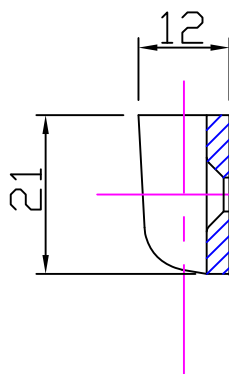


Notes:—
For marine applications, use a silicone sealant or a bedding compound to avoid electrolytic action between the cleat and metal fastenings.

Section 'BB'

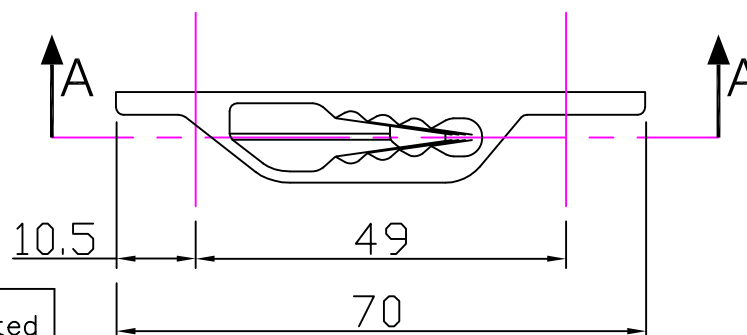

Section 'AA'

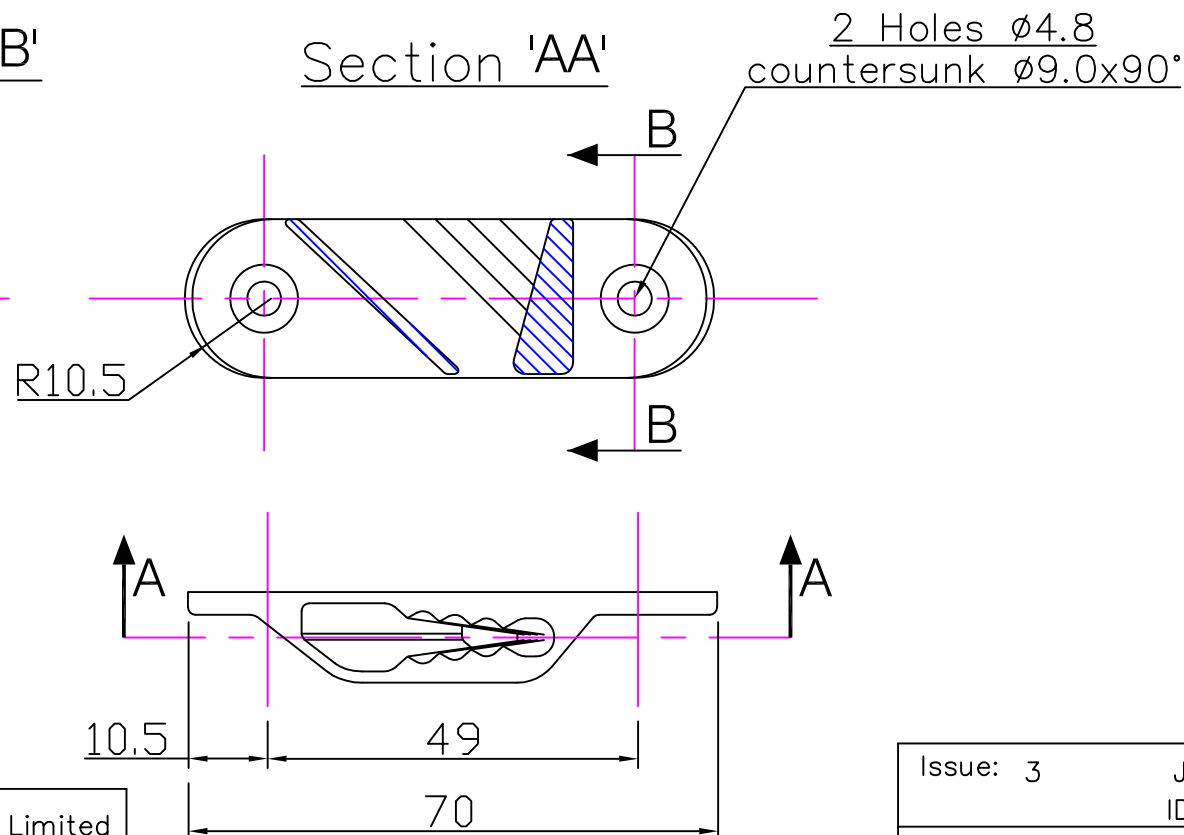

Clamcleats Limited
Watchmead
Welwyn Garden City
Hertfordshire AL7 1AP
England
Telephone +44 (0)1707 330101
Fax +44 (0)1707 321269
Email sales@clamcleat.com
www.clamcleat.com



Scale 1:1
All dimensions in mm.

Issue: 3 Jan 2009
ID273.dwg

Material:
Diecast Aluminium

Installation Drawing for:—

CL273

Racing Sail Line Cleat