


Sailing applications for Aero cleats

Toe strap adjustment

CL828-68AN is used to adjust toe straps on this GP14 dinghy.
Using 4mm rope, this is a neat rig that is easy to adjust.

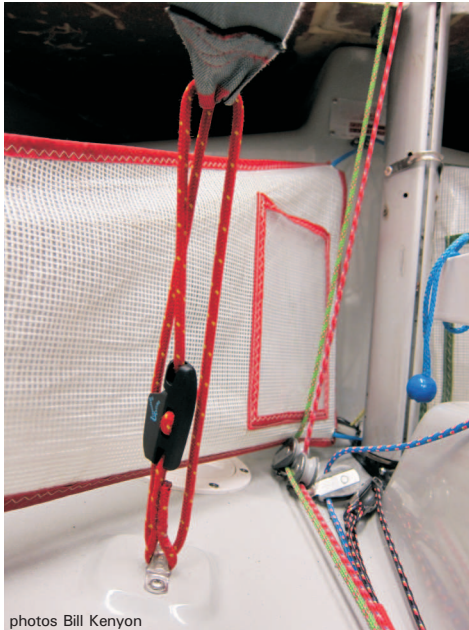

photos Bill Kenyon



Topping lift

CL827-11 is used for this topping lift. This rig uses a block at the mast head. It is easy to unrig the cleat if the boom has to be fully lowered.



photos Keith Egerton

