





# CL279 cleat and items for recycling bags

- Used on semi-buried recycling bag systems, also known as deep collection containers.
- Cleat, Loop, Rope and Tubes make a complete bag closing kit.
- Strong, corrosion & impact resistant for long life.

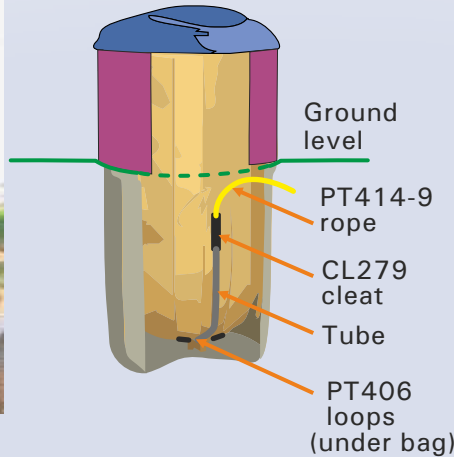

CL279 fixed to bag. Used to control rope that closes bag.

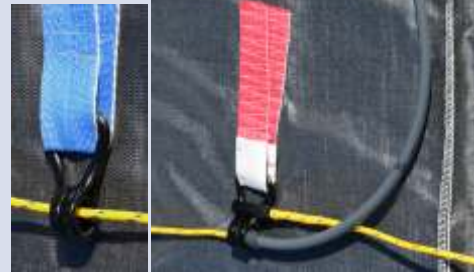

5 - 8 PT406 Loops guide rope at bottom of bag.



**CL279 cleat**



**PT406 Loop**



**PT414-9 Rope**



**PT413-1 Hose Assembly**



**PT417-1 Hose Assembly**

**PT416-1 Hose Assembly**




## Technical information



10mm  
3/8" Ø



250gms  
9 ozs




M6 (supplied)

**CL279** is supplied complete with backplate and stainless steel M6 fastenings. Fabric is firmly gripped between the cleat base and backplate. The bolts can be tightened by hand.



95gms  
3.4 ozs

Usually 5 to 8 **PT406** are fitted per bag. When fitting on the end of the tube, use M5x25mm (#10x1") caphead bolt. Make sure PT406 can rotate around hose.



**PT414-9.** Low friction, braided rope. Fabric covered eye fits over PT406.


8.2m/27ft minimum.



10mm  
3/8" Ø



330gms  
12 ozs



### Hose.

Use this chart to select the hose that is best for your bag size, application and environment.



	<b>PT413-1</b> Assembly with grey plastics tube.	<b>PT416-1</b> Assembly with black plastics tube.	<b>PT417-1</b> Assembly with black rubber tube.
Construction	PVC tube with spiral reinforcement. Ends glued.	Tube has plastics inner, 2 layers of fibre reinforcement, urethane outer. Ends fitted into tube & cannot be removed.	Tube has synthetic rubber inner, 2 layers of steel wire reinforcement, rubber outer. Ends fitted into tube & cannot be removed.
Weight	180gm. 6oz.	380gm. 13oz.	910gm. 2lb.
Price	1x	1.75x	1.75x
Temperature range	-10 to +80 C +15 to +180 F	-30 to +100 C -20 to +220 F	-30 to +100 C -20 to +220 F
Advantages	Light weight. Good value. Totally weather proof.	Abrasion resistant outer. Low friction inner. Totally weather proof.	Almost impossible to bend or crush. Can be used as a handle to pull bag.
Suggested use	Smaller bags. Lighter loads. Coastal environment.	Larger bags. Heavy loads. Sub-zero temperatures. Coastal environment.	Larger bags. Heavy loads. Sub-zero temperatures.
Caution	Ensure tube is not bent or crushed in use.	If tube is bent or crushed, straighten before use.	If outer cover is abraded, wires could damage bag. Operator should wear PPE