

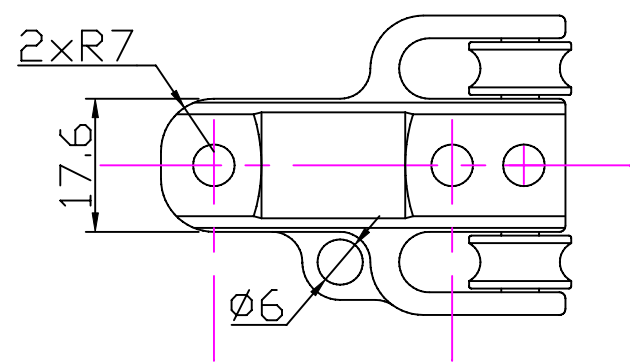
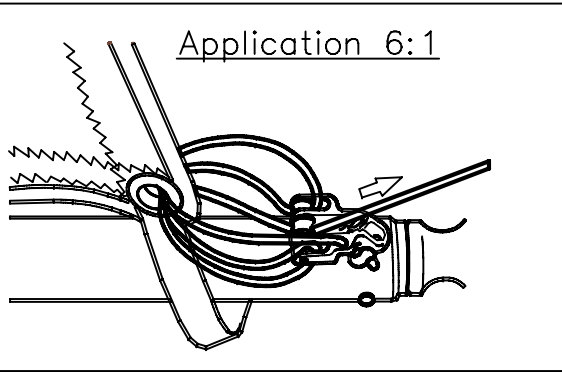
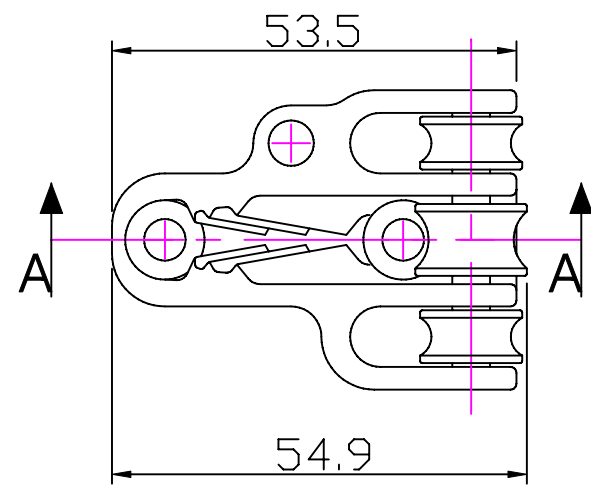
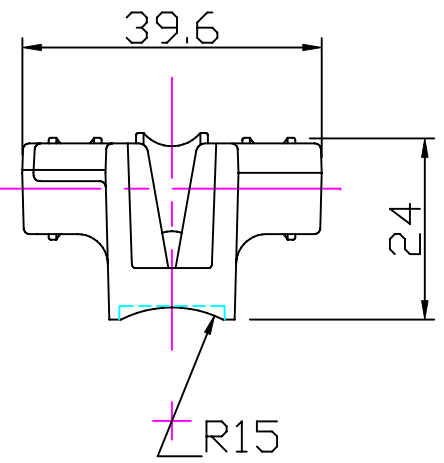


Notes: -
 For marine applications, use a silicone sealant or a bedding compound to avoid electrolytic action between the cleat and metal fastenings.

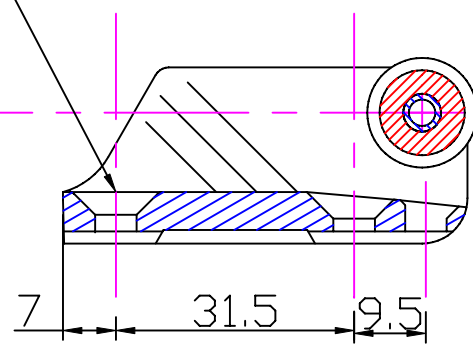

3 Holes $\phi 5.5$
 2 countersunk $\phi 10.5 \times 90^\circ$

Section 'AA'

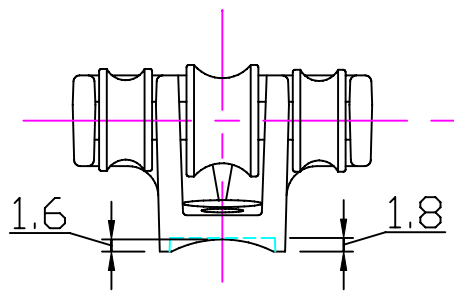

Clamcleat®
 Rope cleats

Clamcleats Limited
 Watchmead
 Welwyn Garden City
 Hertfordshire AL7 1AP
 England

Telephone +44 (0)1707 330101
 Fax +44 (0)1707 321269
<http://www.clamcleat-rope-cleats.com>

Scale 1:1
 All dimensions in mm.

Issue: 2.	May 2006 ID247.dwg
Material: Cleat - Diecast Aluminium Roller - Reinforced Nylon	
Installation Drawing for:- CL247 Compact Twin Sheave Cleat	