
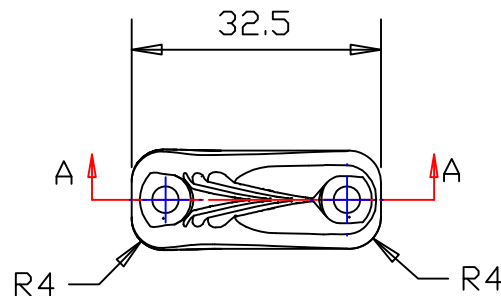
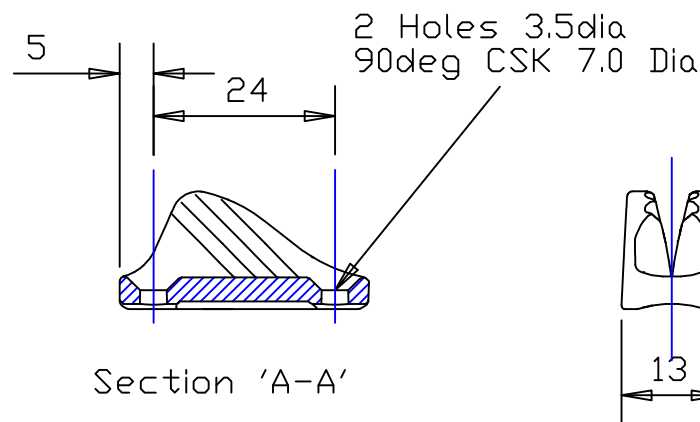


Notes: -
For marine applications, use a silicone sealant or a bedding compound to avoid electrolytic action between the cleat and metal fastenings.



Issue: 1 Oct 2009
ID274.dwg

Material:
Nylon

Installation Drawing for:-

CL274

Open Micros



Scale 1:1
All dimensions in mm.



Clamcleats Limited
Watchmead
Welwyn Garden City
Hertfordshire AL7 1AP
England
Telephone +44 (0)1707 330101
Fax +44 (0)1707 321269
Email sales@clamcleat.com
www.clamcleat.com