

Clamcleat®
Rope cleats


CK Cleat Range
Performance cleating
for Control Lines
clamcleat.com/ck

High quality, marine grade, stainless steel, aluminium and engineering plastics. Cleats available in silver or hard anodised finish.

Cage provides alignment and cleating from a distance.



Alloy cleat.
No moving parts.
Positive rope grip.

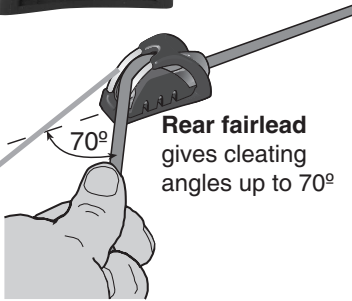

Rear fairlead
gives cleating
angles up to 70°




Keeper
automatically
keeps rope
in or out
of cleat.


Keeper allows rope to run free when uncleated.



Positive click when rope is cleated.

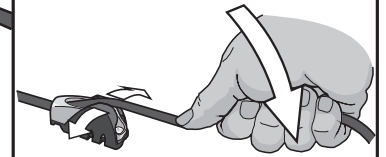

Lift up to release. **Keeper** opens to allow rope out of teeth.

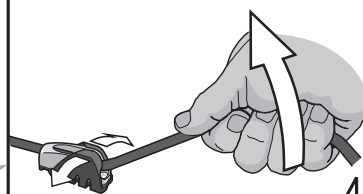

Rope gripped. **Keeper** holds rope in cleat.



CL825CKC silver
CL825CKCAN Hard Anodised

Two cleats pre-assembled onto tapered base. Fit new or replace CL211 Mk1 without drilling new holes.



3-6 mm	M5	4.8 mm	150 gms
1/8-1/4"	#10, 3/16"	N°10	5.3 ozs

CL833CKC silver
CL833CKCAN Hard Anodised

Use as a new fitting or to replace CL211 Mk1 without drilling new holes.



3-7 mm	M5	4.8 mm	75 gms
1/8-1/4"	#10, 3/16"	N°10	2.7 ozs

CL830CKC silver
CL830CKCAN Hard Anodised

Side fixing cage allows cleat to be used as a direct replacement to cams.




3-6 mm	M4	4.2 mm	58 gms
1/8-1/4"	#8, 5/32"	N°8	2.0 ozs

CL832CKC silver
CL832CKCAN Hard Anodised

Use as a new fitting or to replace CL211 Mk2 without drilling new holes.




3-6 mm	M4	4.2 mm	51 gms
1/8-1/4"	#8, 5/32"	N°8	1.8 ozs

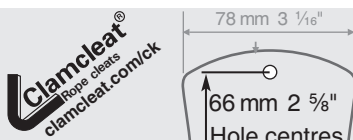


Two cleats - Only one set of fixing holes.


Cleat angles up to 70°

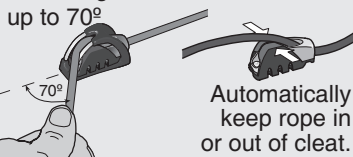


Automatically keep rope in or out of cleat.

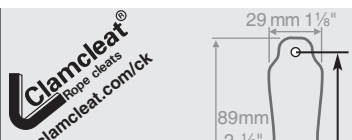

Cleat angles up to 70°

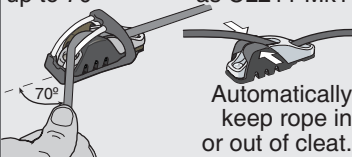


Automatically keep rope in or out of cleat.

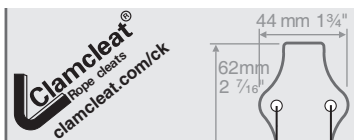


Side fixing = direct Cam replacement.


Cleat angles up to 70°

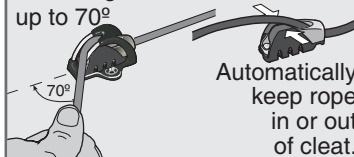

Automatically keep rope in or out of cleat.

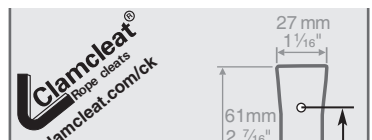

Cleat angles up to 70°

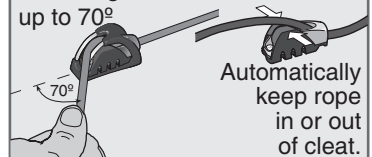

Automatically keep rope in or out of cleat.